

# 4 x 4 / 8 x 8 True 4K HDMI Matrix Switch


VM0404HB / VM0808HB



reddot award 2015  
winner interface design

- ATEN's VM0404HB / VM0808HB is a True 4K HDMI Matrix Switch series that offers an easy and affordable way to route any of 4 / 8 HDMI video sources to any of 4 / 8 HDMI displays. Featured with the superior video resolutions up to 4096 x 2160 @ 60Hz (4:4:4), the VM0404HB / VM0808HB delivers robust signal routing and ultra-fast digital video switching, making it perfect for applications where routing of True 4K digital signals is required, such as event venues, digital classrooms, auditoriums, department stores, and more.

The intuitive GUI design of the VM0404HB / VM0808HB allows users to flexibly configure any input to output connections, eliminating the need of frequent physical configuration changes. In addition to the built-in web GUI, the VM0404HB / VM0808HB can be operated through front-panel pushbuttons, IR remote, RS-232 control, and Telnet via Ethernet connections, giving users the ultimate convenience while keeping the system available with performance video switching anytime.

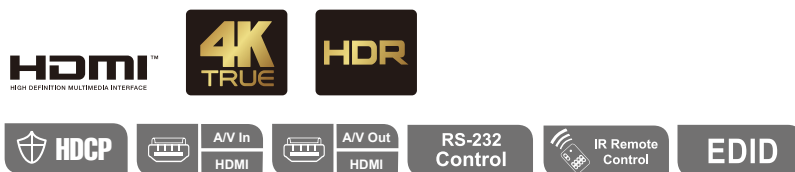

VM0404HB Front view



VM0404HB Rear view



VM0808HB Front view




VM0808HB Rear view



## Features

- Connects any of 4 / 8 HDMI sources to any of 4 / 8 HDMI displays
- Supports True 4K resolutions up to 4096 x 2160 @ 60Hz (4:4:4)
- Multiple Control Methods – system management via front-panel pushbuttons, IR remote, RS-232 control, and Web GUI/Telnet via Ethernet connections
- EDID Expert™ – selects optimum EDID settings for smooth power-up, high-quality display and use of the best video resolution across different screens
- Signaling rates up to 6 Gbits for flawless true 4K output
- Supports Dolby True HD and DTS HD Master audio
- HDMI (3D, Deep Color, 4K) and HDCP 2.2 compatible
- Supports Consumer Electronics Control (CEC)
- ESD protection for HDMI
- Supports ATEN's LockPro™ HDMI cable lock for secure HDMI cable connections
- Firmware upgradeable
- Rack mountable (1U design)

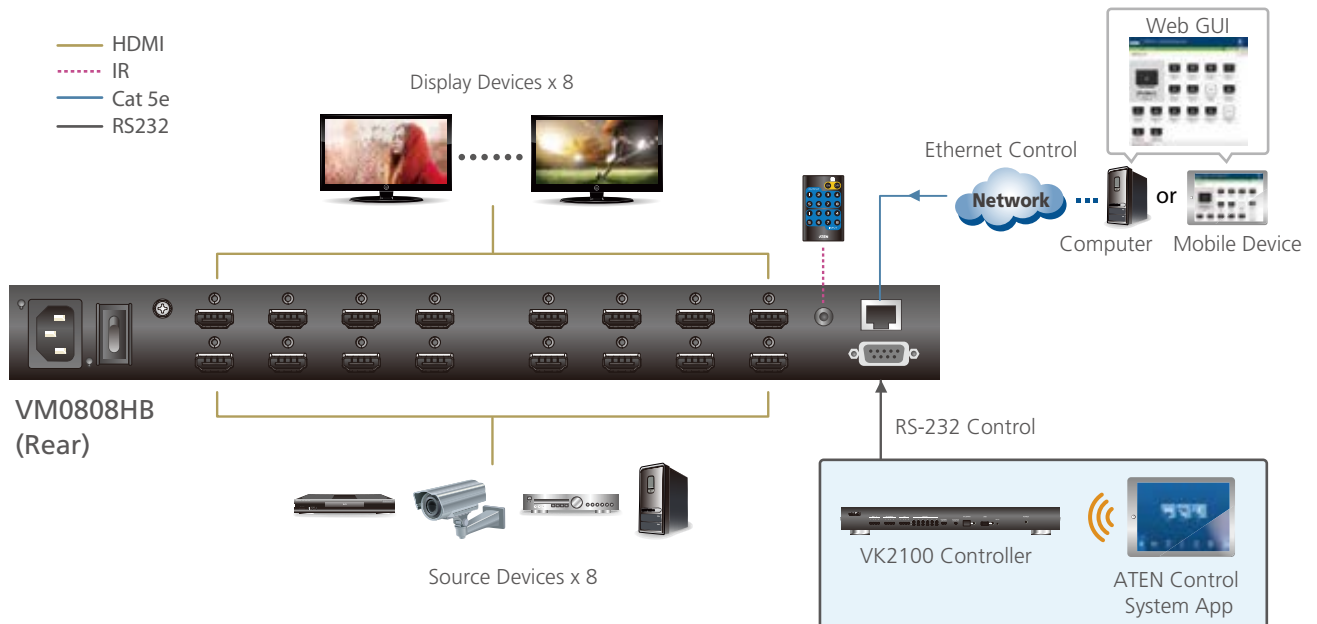

# Specifications

Function	VM0404HB	VM0808HB
<b>Video Input</b>		
Interfaces	4 x HDMI Type A Female (Black)	8 x HDMI Type A Female (Black)
Impedance	100 Ω	
Max. Distance	1.8 m / 4K @ 60Hz (4:4:4)	
<b>Video Output</b>		
Interfaces	4 x HDMI Type A Female (Black)	8 x HDMI Type A Female (Black)
Impedance	100 Ω	
Max. Distance	3m / 4K @ 60Hz (4:4:4) 15m / 1920 x 1200	
<b>Video</b>		
Max. Data Rate	18 Gbps (6 Gbps Per Lane)	
Max. Pixel Clock	600 MHz	
Compliance	HDMI (3D, 4K, Deep Color) HDCP 2.2 Compatible Consumer Electronics Control (CEC)	
Max. Resolution	Up to 4096 x 2160 / 3840 x 2160 @ 60Hz (4:4:4)	
<b>Control</b>		
RS-232	Connector: 1 x DB-9 Female (Black) Baud rate and protocol: Baud Rate: 19200, Data Bits: 8, Stop Bits:1, Parity: No, Flow Control: No	
IR	1 x Mini Stereo Jack Female (Black)	
Ethernet	1 x RJ-45 Female	
<b>EDID Settings</b>	EDID Mode: Default / Port 1 / Remix / Customized (EDID Wizard Support)	
<b>Power</b>		
Connectors	1 x 3-Prong AC Socket	
Maximum Input Power Rating	100-240 VAC; 50-60 Hz; 1.0A	
Consumption	AC110: 17.8W:83; AC220:17.6W:83	AC110: 38.1W:179; AC220:37.8W:177
<b>Environmental</b>		
Operating Temperature	0° - 40° C	
Storage Temperature	-20° - 60° C	
Humidity	0 - 80% RH, Non-Condensing	
<b>Physical Properties</b>		
Housing	Metal	
Weight	2.47 kg	3.99 kg
Dimensions (L x W x H)	43.72 x 16.28 x 4.40 cm	43.24 x 26.23 x 4.40 cm

Product information is subject to change without prior notice.

## ATEN International Co., Ltd.

3F, No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Publish Date: 06/2018 V1.0



© Copyright 2018 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their  
 respective owners.