

Daikin Sensira  
**Refreshingly  
new**



Discreet wall mounted unit providing high efficiency and comfort



# Why choose Daikin



Creating the perfect indoor climate is what Daikin units are all about.

With more than 90 years of experience in climate control technologies, we understand what it takes to create a comfortable environment for your home, business or office. That's why we are proud to introduce the latest edition of our Split range: Sensira R-32.

Equipped with R-32 refrigerant and enhanced features, Sensira uses the latest technologies to achieve more energy efficiency and energy savings.

Discover how Sensira R-32 can help you achieve your perfect climate.



# Why choose Daikin's Sensira

## ✓ Efficiency **A<sup>++</sup>**

**Sensira creates a comfortable interior environment while maintaining excellent energy efficiency ratings.**

› Seasonal efficiency gives a more realistic indication on how efficient air conditioners operate over an entire heating or cooling season. Choosing for an R-32 product, reduces the environmental impact

with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency. Sensira R-32 achieves A<sup>++</sup> in heating with R-32 refrigerant

## **BLUEVOLUTION** Thinking beyond today

From 2025 on, the European F-gas regulation prescribes the use of refrigerants with a GWP below 750 for all pair split air conditioner installations with a refrigerant charge below 3kg. R-410A (GWP 2087.5) will remain available for other applications and service.

Daikin first introduced R-32 in 2012. Its low GWP of 675, competitive energy efficiency, safety and affordability make it very attractive. From 2016 Daikin offers you a unique Bluevolution range of pair and multi units that once again sets the benchmark for residential air conditioning. An intelligent and fresh design combines leading efficiency values with top comfort features.

### An old friend who doesn't make trouble

Using R-32 is not unknown territory because R-410A is a blend of 50 % R-32 and 50 % R-125. Additional benefits of using the single component refrigerant R-32 include the prevention of fractioning or gliding problems and easier recharging and recycling.

Handling as you like it: With working pressures similar to R-410A, the possibility to charge in both liquid and gas phase, and the availability of tools suitable for both R-32 and R-410A equipment, deciding for the Daikin Bluevolution range is easy.



## ✓ Reliability

To guarantee the seamless operation of your heating system, the Sensira range offers enhanced features:

- › Swing compressor: enhanced compressor uses inverter technology and small capacity steps to adjust a unit's power and meet energy demands. In comparison to a rotary compressor, the swing compressor provides more energy savings, a lower risk for unit breakdown and quieter and vibration-free operation
- › Most extensive testing before new units leave the factory

## ✓ Comfort


With the Sensira range, you never have to sacrifice comfort for energy efficiency.

### Perfect comfort

A flat, stylish front panel blends in easily with any interior décor and is easier to clean. Vertical auto swing with these wall mounted units moves the discharge louvres up and down to give you efficient air and temperature distribution throughout the room. Turbo mode means that the room can heat up or cool down rapidly, for maximum comfort.

### Low Sound

With sound pressure down to 21dBA the new Sensira operates almost unnoticed ensuring a good night's sleep.

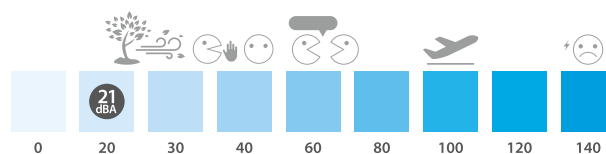



## ✓ Easy control

With the Daikin Online Controller, you can schedule, manage and monitor your heating system from anywhere.

Simply connect your unit to Wi-Fi and download the app to change the thermostat, set temperature schedules, review your energy consumption and develop your own "If this, then that" workflow. The Daikin Online Controller is also available as a built-in feature for your Daikin unit (optional).



### Your home

This screen provides you with an overview of your home, and access to all of the features to control up to 50 units at once.



### Individual rooms

With the interactive thermostat, you can adjust the temperature, operating mode, air purification and fans for individual rooms.



### Time scheduling

Create different schedules with up to 6 actions a day for 7 days and activate specific operation modes.



### Energy usage

Icons show where you can save on energy and money



### If this, then that

Programme your unit to reflect your lifestyle. Connectable with different appliances via the iFTTT platform, you can control the indoor climate of your home from a distance. For example: If you leave your house, then your heating will turn off.



The infrared remote control is user-friendly and has a timer function which allows you to programme the unit to start or stop when you want it to.

The infrared remote control is user-friendly and has a timer function which allows you to programme the unit to start or stop when you want it to.

**Powerful mode**  
heat up or cool down rapidly

**Vertical swing**  
efficient air distribution

**Timer**  
allows you to programme the unit, including on/off and night set mode\*  
\*1hr after activation of night set mode, the set point is increased in cooling or decreased in heating to ensure comfortable sleeping conditions

**Comfort**  
Intelligent flow of air evades direct contact with people

Remote controller for FTXB20-35C

# Wall mounted unit


Wall mounted unit for low energy consumption and pleasant comfort

- › Seasonal efficiency values up to A++ in cooling
- › Online controller (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › Quiet in operation down to 21 dBA
- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency



Efficiency data		FTXF + RXF	20A + 20A	25A + 25A	35A + 35A	50A + 50A	60A + 60A		
Cooling capacity	Min./Nom./Max.	kW	1.3/2.00/2.6	1.3/2.50/3.0	1.3/3.30/3.8	1.7/5.00/6.0	1.7/6.00/7.0		
Heating capacity	Min./Nom./Max.	kW	1.30/2.50/3.50	1.30/2.80/4.00	1.30/3.50/4.80	1.70/6.00/7.70	1.70/6.40/8.00		
Power input	Cooling	Min./Nom./Max.	kW	0.31/0.51/0.72	0.31/0.76/1.05	0.29/1.00/1.30	0.32/1.50/1.83	0.33/1.85/2.98	
	Heating	Min./Nom./Max.	kW	0.25/0.60/0.95	0.25/0.70/1.11	0.29/0.94/1.29	0.44/1.62/2.36	0.46/1.63/2.79	
Space cooling	Energy efficiency class		A++						
	Capacity	Pdesign	kW	2.00	2.50	3.50	5.00	6.00	
	SEER			6.15	6.22	6.21	6.21	6.15	
	Annual energy consumption		kWh/a	114	141	197	282	342	
Space heating (Average climate)	Energy efficiency class		A+						
	Capacity	Pdesign	kW	2.20	2.40	2.80	4.60	4.80	
	SCOP/A			4.10	4.10	4.06	4.06	4.06	
	Annual energy consumption		kWh/a	751	827	965	1,584	1,655	
Nominal efficiency	EER		3.94	3.30	3.30	3.33	3.25		
	COP		4.19	4.01	3.71	3.71	3.93		
	Energy labeling Directive	Cooling/Heating	A/A						
Indoor unit		FTXF	20A	25A	35A	50A	60A		
Dimensions	Unit HeightxWidthxDPTH	mm	286x770x225			295x990x263			
Weight	Unit	kg	9.00			13.5			
Air filter	Type	Removable / washable							
Fan	Air flow	Cooling	Silent operation/Low/Medium/High	m <sup>3</sup> /min	4.4/5.9/7.9 /9.8	4.4/6.1/8.1 /10.1	4.5/6.3/8.3 /11.5	10.5/11.9/14.4 /16.8	10.7/12.2/14.8 /17.3
	rate	Heating	Silent operation/Low/Medium/High	m <sup>3</sup> /min	5.3/6.5/8.4 /10.3	5.3/6.7/8.6 /10.3	5.3/7.0/9.0 /11.5	10.7/12.2/14.8 /17.3	11.3/12.8/15.8 /17.9
Sound power level	Cooling/Heating			dBA	55/55		59/61	60/62	
Sound pressure level	Cooling	Silent operation/Low/High		dBA	20/25/39	20/26/40	20/27/43	31/34/43	33/36/45
	Heating	Silent operation/Low/High		dBA	21/28/39	21/28/40	21/29/40	30/33/42	32/35/44
Control systems	Infrared remote control		ARC470A1						
	Wired remote control		BRC944B2 / BRC073A1						
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240						
Outdoor unit		RXF	20A	25A	35A	50A	60A		
Dimensions	Unit HeightxWidthxDPTH	mm	550x658x275			735x825x300			
Weight	Unit	kg	28			47			
Sound power level	Cooling/Heating			dBA	60/61	62/62	61/61	63/63	
Sound pressure level	Cooling	High		dBA	46	48	47	49	
	Heating	High		dBA	47	48	49	49	
Refrigerant	Type/ GWP		R-32/675.0						
	Charge	kg/TCO <sub>2</sub> Eq	0.70/0.48			1.40/0.95	1.45/0.98		
Piping connections	Liquid	OD		mm	6,35		6,4		
	Gas	OD		mm	9,5		12,7		
	Piping length	OU - IU	Max.	m	15		30		
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)				
Level difference	IU - OU	Max.		m	12		20.0		
Power supply	Phase/Frequency/Voltage	Hz/V	1~/50/220-240						

Daikin Europe N.V. Naamloze Vennootschap Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · RPR Oostende (Responsible Editor)



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

The present publication supersedes ECPEN18-006. Printed on non-chlorinated paper.