

## Adhesive lubricant HHS® Grease

**High-quality, white, long-life maintenance grease with PTFE**

### Durable

- Excellent sealing behaviour against moisture and dirt. This provides optimum oxidation resistance and extends lubrication intervals.
- Excellent corrosion protection

### Excellent material compatibility

- Excellent compatibility with plastic
- Neutral behaviour with painted surfaces

### Contains PTFE solid lubricant

- Once the grease film has been torn off, the PTFE performs the lubrication (emergency running property)
- Highly temperature-resistant

### With special, white pigmentation

Optimum identification of lubricating points during maintenance and service work.

**Resistant to spray water and salt water, weak acids and bases**

**Silicone, acid, resin and AOX-free**



Contents	400 ml
Chemical basis	Mineral oil
Oil basis	Mineral oil
Colour	Brilliant white
Min./max. temperature conditions	-15 to 130 °C
Max. short-term temperature resistance	150 °C
Shelf life from production	24 Month

**Art. No. 0893 106 7**

P. Qty.: 1 / 12


### Details/Application

Suitable for lubricating during maintenance and service tasks, e.g. hinges, joints, sliding rails and much more.

## Sealing behaviour to protect against dirt and spray water



The grease forms a sealing "grease collar" between the basic body and counter body to protect against moisture and dirt particles. Dirt is prevented from entering the lubricating points, therefore ensuring long-term lubrication. The extended lubrication intervals are only possible with thorough pre-cleaning of the lubrication point. We therefore recommend cleaning thoroughly before each use with HHS® Clean.

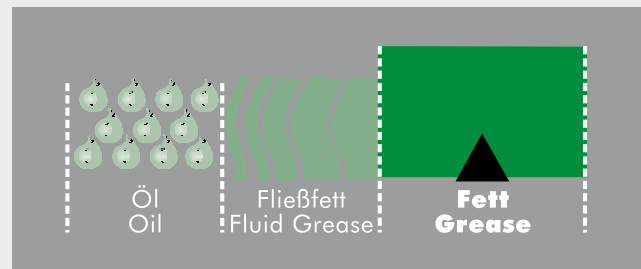

## Instructions

Shake can well before use. Thoroughly clean the lubricating point before application. Then spray onto the cleaned surface.

The usage instructions are recommendations based on the tests we have conducted and based on our experience; carry out your own tests before each application. Due to the large number of applications and storage and processing conditions, we do not assume any liability for a specific application result. Insofar as our free customer service provides technical information or acts as an advisory service, no responsibility is assumed by this service except where the advice or information given falls within the scope of our specified, contractually agreed service or the advisor was acting deliberately. We guarantee consistent quality of our products. We reserve the right to make technical changes and further develop products.

Related products	Art. No.
Adhesive lubricant pre-cleaner HHS® Clean	0893 106 10